

PIPETITE®

EASY TO INSTALL SEALING SOLUTION

Parameters

- Silicone conforms to FDA 21 CFG 177.2600
- Pipetite® Silicone is suitable for long term use between -40°C and +140°C and for short term use between -50°C and +250°C

Applications / Uses

Suits Pipe or Tube...

- Through walls, ceiling, floors
- Food, Beverage, Process & More
- Eliminates dust, moisture & rodents

Stainless Steel Ladder Clip

Used for pre-existing pipelines

Pipetite® Wall Entry Reboot Option


- Suits pipe/tube from 0-380mm diameter



Pipetite® Anchors available

Marked Cutting Grooves


To suit standard diameters

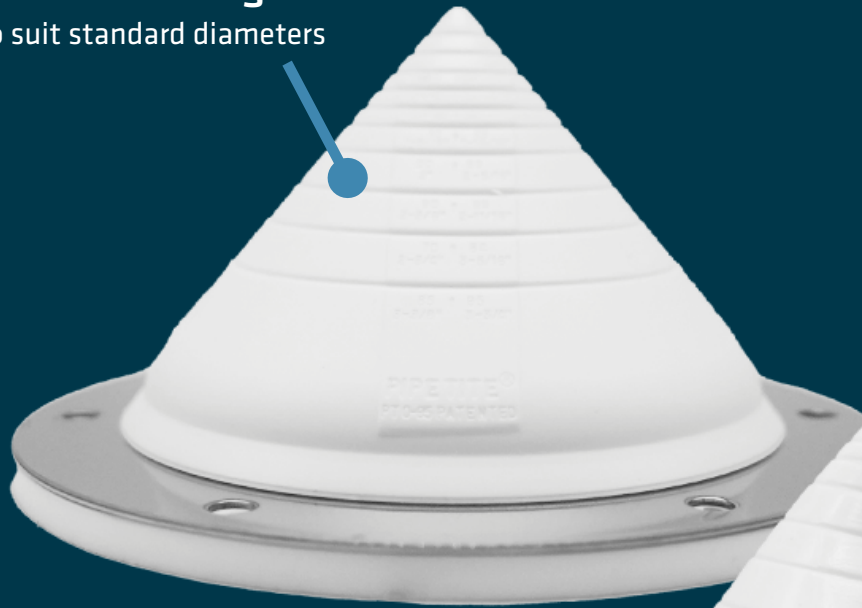

Pipetite® Wall Entry Flange

- Suits pipe/ tube from 0-180mm diameter

Surface Base Ring with pre-drilled holes

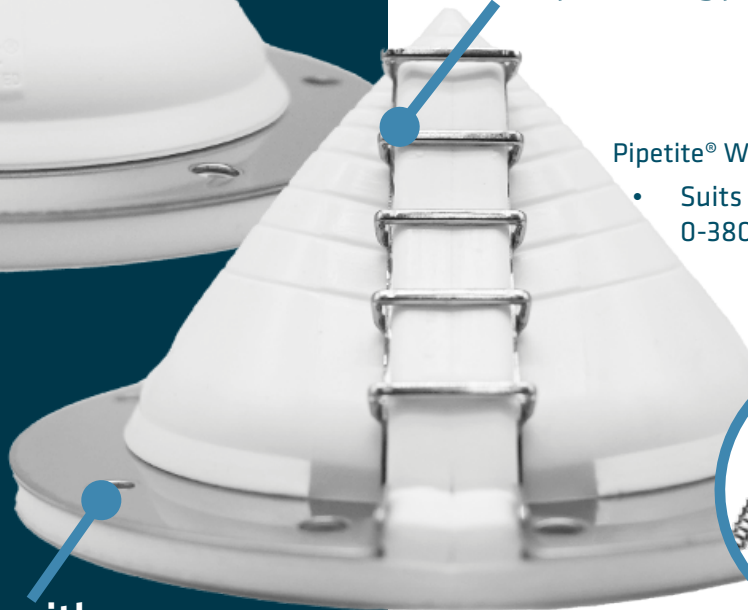

*Short term use



THEMETALCOMPANY

TALK 0508 304 316

VIEW themetalconpany.co.nz

TYPE sales@themetalconpany.co.nz

PIPETITE® WALL ENTRY FLANGE

Code	Size	A(mm)	B(mm)	C(mm)	D(mm)
*PT025	0-25	70	30	57	52
PT065	0-65	106	64	91	60
PT095	0-95	147	100	128	78
PT70135	70-135	187	140	168	64
PT100180	100-180	237	180	213	84


PIPETITE® WALL ENTRY REBOOT

Code	Size	A(mm)	B(mm)	C(mm)	D(mm)
PT065RB	0-65	106	64	91	60
PT095RB	0-95	147	100	128	78
PT70135RB	70-135	187	140	168	64
PT100180RB	100-180	237	180	213	84
*PT125275RB	125-275	337	280	313	137
*PT165380RB	165-380	490	434	467	200



*unstocked item / ETA 3-5 working days



WALL ENTRY FLANGE

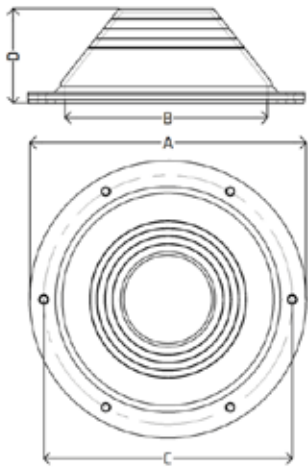

WALL ENTRY REBOOT

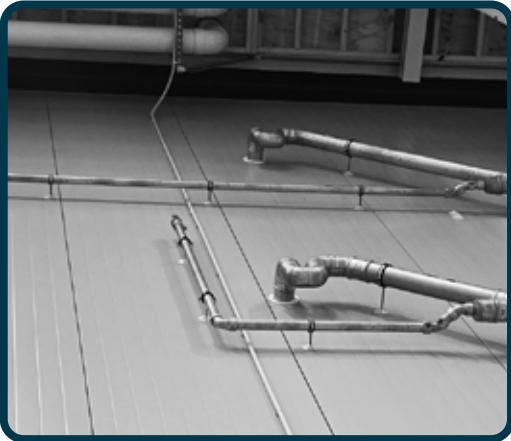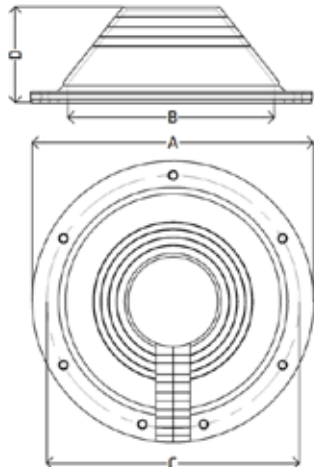

Supplying to all of **New Zealand**

TALK 0508 304 316
VIEW themetalcompany.co.nz
TYPE sales@themetalcompany.co.nz